



Laser-engraved anilox rolls and sleeves

What's your
reputation worth?



Making our planet more productive™

When your reputation is on the line, we protect it.

Praxair's Laser-Engraved Anilox Rolls and Sleeves Lead the Industry

In 1979, Praxair Surface Technologies created the anilox roll industry by producing the world's first laser-engraved ceramic roll. For more than a quarter century, printers and converters around the world have turned to Praxair for anilox rolls and coatings that fit their application and offer longer service life, reduced downtime and greater productivity. See why...

Applications

- Applicators (Coating, Laminating)
- Corrugated (Pre- and Post-Print)
- Envelope
- Flexible Packaging
- Folding Carton
- Liquid Carton/Aseptic Packaging
- Metal Decorating
- Newspaper
- Printed Electronics
- Publications
- Single Use (Tissue, Towel, Cups)
- Tag and Label
- Wallcoverings

Praxair Surface Technologies' high standards in manufacturing and engraving anilox rolls and sleeves can help protect your reputation.


And only Praxair performs every step in the production process, including:

- Making our own coating powders and gases
- Developing our own coating technology and equipment
- Engraving and finishing in-house


No other anilox roll supplier has more control for ensuring top quality in every product. Because your reputation is on the line every time you're on the press.

Support when and where you need it

We're more than an innovative manufacturer of anilox rolls, sleeves and coatings. Every day, Praxair puts a team of more than 150 people—in addition to a robust agent and distributor network—in seven facilities on four continents to work for you. We provide roll audit and full product technical support, helping you get the best performance, repeatability and quality from your people and equipment. With our worldwide network of Printing Industry Service Centers, we're always close by. **With your reputation on the line, why settle for anything less?**

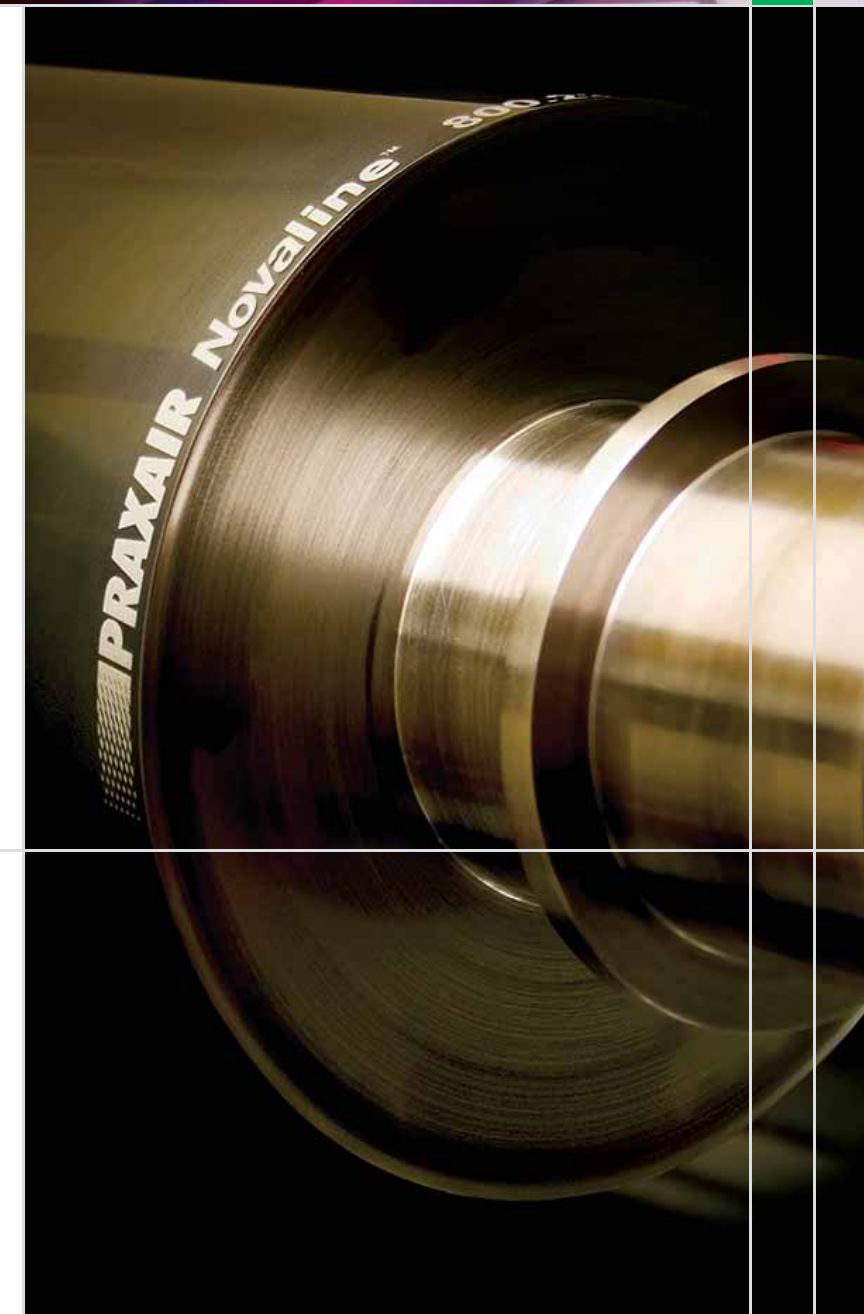

Anilox roll innovation since 1979. Praxair sets the industry standard.

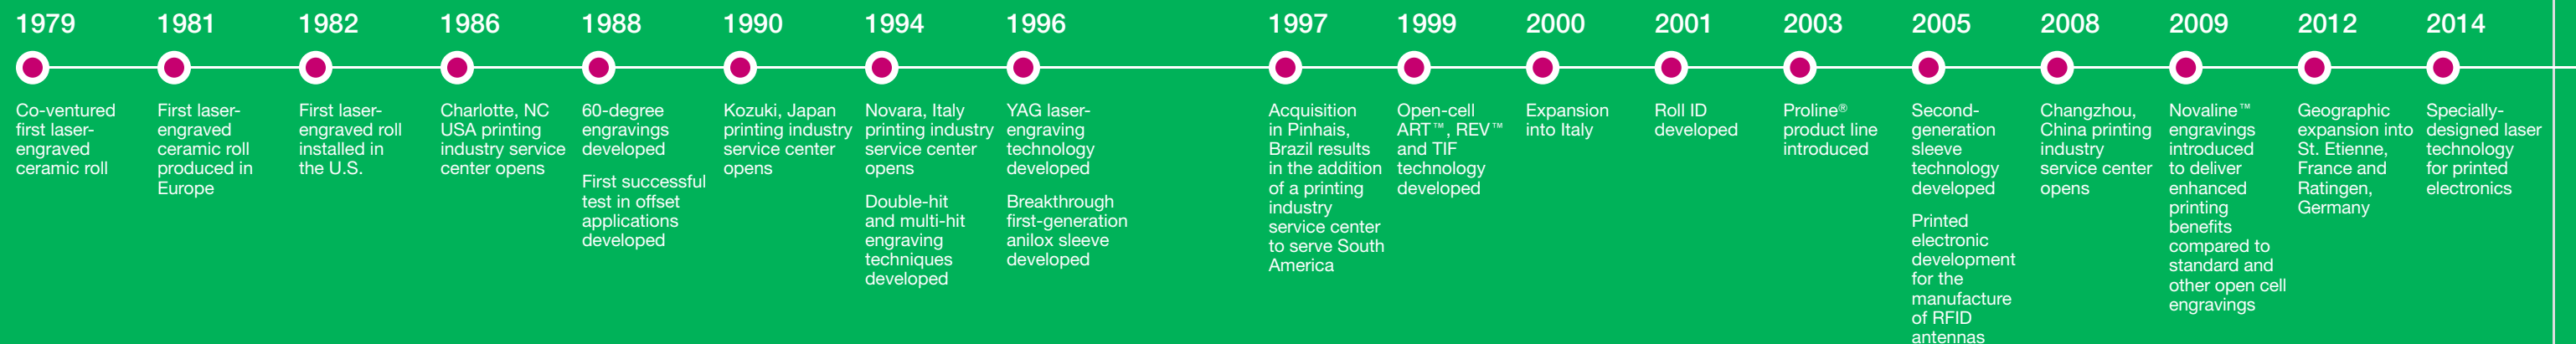


Protecting your reputation step-by-step.

A closer look at our manufacturing process:

Nobody does it like Praxair. We combine our know-how from high-tech industries such as aerospace, oil exploration and energy to provide you with the coating and engraving techniques we have developed over the years. The result is uncompromised high-precision engravings for superior ink release.

Mechanical and dimensional integrity is crucial for base rolls

Each of Praxair's anilox rolls is built to exacting specifications, which is crucial to print quality.



1. Inspection/Base Repair

To start, each roll or sleeve is inspected. Praxair service technicians check each anilox roll or sleeve for pattern, screen count, volume, cleanliness, damage and any other relevant conditions. The technicians inspect rolls for cell depth and wear and take digital photographs of each roll's engraved surface using a high-powered microscope. Damage such as dents is repaired prior to restoring the roll.



2. Grit Blast

Prepared rolls are "grit blasted" to precisely roughen the roll surface with abrasive particles in preparation for coating. Oxides and other solid contaminants can be removed by impinging all or selected areas of the roll with an abrasive material.



3. Coating/Sealing

Utilizing a proprietary thermal spray powder and plasma torch to create a dense, hard, low-porosity chrome-oxide ceramic coating and a proven sealing technology makes our rolls more corrosion resistant than many others. This high-integrity, uniform coating extends the life of rolls and sleeves.



4. Grinding/Lapping

The newly coated surface is ground to precise dimensions, removing all excess materials, and polished to create a smooth surface.




5. Engraving

The laser engraves a microscopic pattern into the roll or sleeve specific to the type of print application. We can engrave from eight lines per inch up to high-resolution patterns of 1300 lines per inch and over a million cells per inch. This proper cell volume and structure allows customers to achieve accurate color reproduction.



6. Superfinishing

This process removes the rough peaks from the cell walls, resulting in a smooth, even surface. Superfinishing reduces blade vibration, premature blade wear and ink pooling, and ensures consistent ink delivery over time.

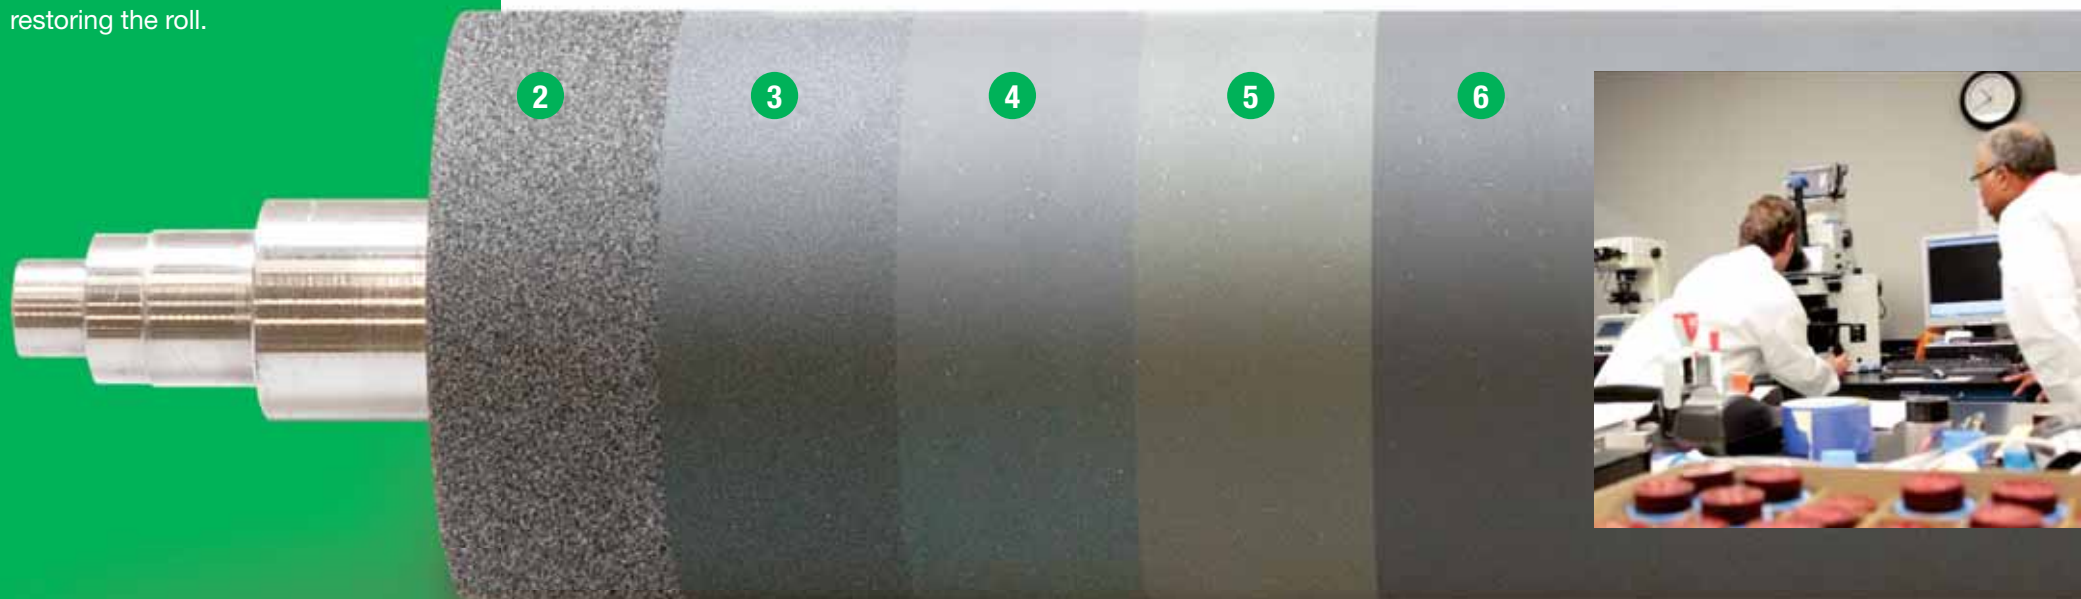

7. Praxair ensures superior quality worldwide

- **Met Labs.** Only Praxair Surface Technologies places a metallurgical laboratory (Met Lab) at each of our Printing Industry Service Centers. Equipped with testing instrumentation and software, our labs allow our technicians to evaluate and certify every anilox roll or sleeve for coating thickness, hardness, line and screen count, coating adhesion, erosion and volume count—to the same high standard of quality everywhere in the world.
- **Tech support.** Our Design Optimization Unit™ is more than technical support. We work with other suppliers (e.g., ink and plate suppliers) to ensure the entire operation is optimized and problems are resolved quickly.
- **ISO certifications.** We have invested in our manufacturing facilities to ensure the highest levels of quality in a safe environment. Our facilities are ISO 9001:2008 certified.




High-performance solutions for versatile applications.

Novaline™ and Proline® Series Laser Engravings


Novaline™ Series

High-quality laser engraving options designed to let rolls run cleaner longer

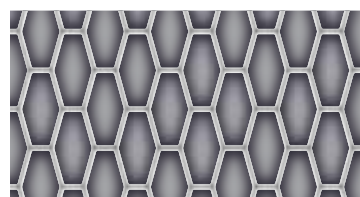


Novaline™ UV Gold

Ideal for UV ink application, including aluminum, film and paper packaging

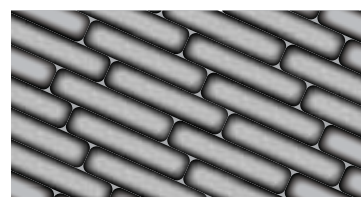

Novaline™ Gold

Developed for high-density flexo printing, particularly high-definition flexible, paper and corrugated packaging



Novaline™ Silver

The right choice for solid, process and text high-density printing




Novaline™ ART™ Gold

Designed for demanding coating, specialty materials and varnish applications


Proline® Series

Exceptional coverage and coating combined with fast cleanup for better productivity

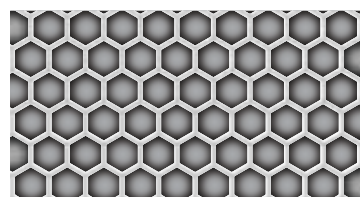

Proline® 60°

Suppresses moiré effects and delivers easy ink transfer and uniform cell structure—our most popular pattern

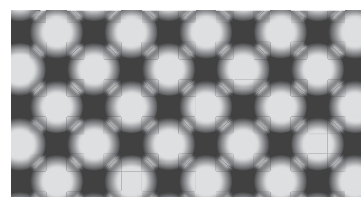


Proline® ART™

Anilox Reverse Technology—designed for flexo printing, offset coating, gravure and laminating applications



Proline® HEL*


Open cell structure offers better ink release for gravure and coater applications

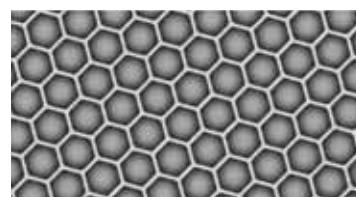

Proline® ISF*

Minimizes splash of UV inks

Printed Electronics

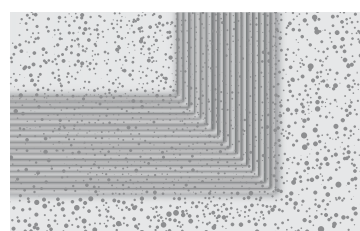

Engraving used to create electrical devices on substrates such as flexible displays, smart labels, posters and active clothing

Engraving images are engineered drawings and are a visual representation only.

*Not available in the U.S.

Why stop with anilox rolls and sleeves? The same quality and leadership we apply to your rolls can apply to other parts of your operations that can benefit from a highly durable or release coating:








- Agitators
- Chamber pumps
- Corona treater rolls
- Feed screws
- Idler rolls
- Ink pans
- Slitter blades
- Pressroom components

Trusted quality and durability for your critical press components

www.praxairsurfacetechologies.com

Industry connections

Innovations come from interactions with the industry and understanding the latest demands and challenges facing our customers. That's why we participate in key associations and initiatives around the world, including:

 <p>FTA (Flexographic Technical Association) Flexo Quality Consortium— founding member</p>	 <p>DFTA Der FlexoDruck. DFTA (German Flexographic Technical Association)</p>	 <p>ATF association technique française de flexographie ATF (French Flexographic Technical Association)</p>
 <p>FTAJ (Flexographic Technical Association of Japan)</p>	 <p>ABFlexo/FTA Brazil</p>	 <p>Premier Vendor ABFlexo Top 10 3-TIME WINNER</p>
 <p>ATIF (Italian Technical Association for the Development of Flexography)</p>	<p>Industry academic programs:</p> <ul style="list-style-type: none"> - Clemson University (U.S.) - Fox Valley Technical College (U.S.) - Swansea University (Wales) - University of Stuttgart (Germany) - Western Michigan University (U.S.) 	


Praxair Printing Industry Service Centers



Wherever you are in the world, you'll find a Praxair Printing Industry Service Center there to protect your reputation. Our world-class Operational Excellence System—which includes a robust worldwide agent and distributor network—enables us to deliver quick responses and options, and uniform, repeatable results you can rely on. Whether we build or rework your roll in the Americas, Europe or Asia, you can be confident in the processes, coatings and quality engravings.

Call the nearest location or email psti-info@praxair.com.

Or visit www.praxair.com/printing to learn more.

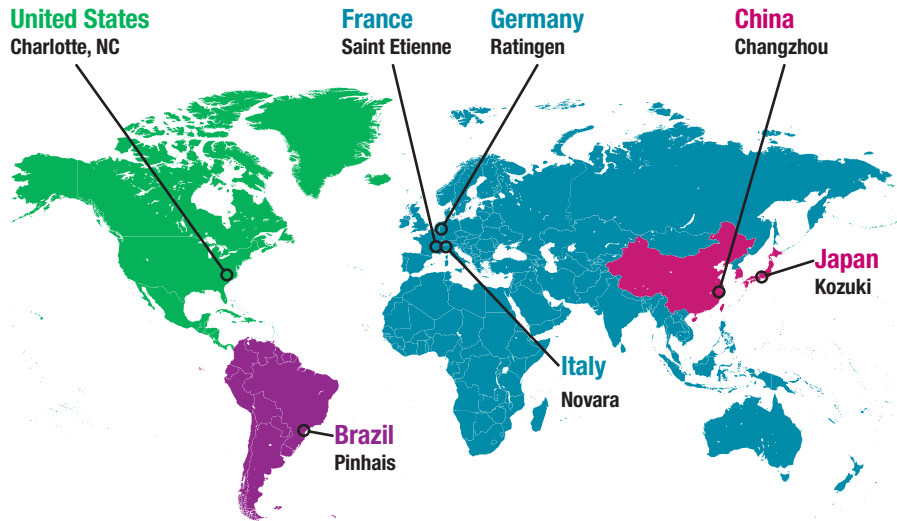

China (Changzhou)

Praxair Surface Technologies
37 Longhui Road
Wujin Hi Tech Industrial Zone
Changzhou, Jiangsu Province
China 213164
Tel. +86.519.8622.9000

Italy (Novara)

Praxair S.r.l
Via Fleming 3
28100 Novara
Italy
Tel. +39.0321.674811
Fax. +39.0321.36691

France (Saint Etienne)

Praxair Surface Technologies S.A.
42 Allee Jules Bigot BP 80688
Z.I. Molina la Chazotte
F-42043 Saint Etienne, CEDEX 1
France
Tel. +33.4.77.42.62.62
Fax. +33.4.77.42.62.60

Japan (Kozuki)

Praxair Surface Technologies
580-18, Kuzaki
Sayo-cho, Sayo-gun
Hyogo Pref., 679-5641
Japan
Tel. +81.790.88.0564
Fax. +81.790.88.0548

Brazil (Pinhais)

Praxair Surface Technologies do Brasil Ltda
Av. Maringa, 400
CEP 83324-000
Pinhais, Brazil
Tel.: +55.41.3661.6200
Fax: +55.41.3661.6230

Germany (Ratingen)

Praxair Surface Technologies GmbH
Robert-Zapp-Strasse, 7
40880 Ratingen
Germany
Tel. +49.2102.495.200
Fax. +49.2102.495.219
www.praxair-gmbh.de

United States (Charlotte, NC)

Praxair Surface Technologies
8501 Old Statesville Road
Charlotte, NC 28269 USA
Tel. +1.704.921.5400
Fax. +1.704.921.5425
Toll free 1.800.234.3131

Making our planet more productive™



© 2015 Praxair S.T. Technology, Inc.
All rights reserved.

Praxair, the Flowing Airstream design, Making our planet more productive, ART, Nova, Novaline, Proline, REV and UV Gold are trademarks of Praxair S.T. Technology, Inc.

Cover pattern is representative; not actual roll engraving.

The information contained herein is offered for use by technically qualified personnel at their discretion and risk without warranty of any kind.

Printed in the United States of America
04-15
Printed on recycled paper
P-40-4061

Praxair Surface Technologies, Inc.
1500 Polco Street
Indianapolis, IN 46222
USA

Telephone: +1.317.240.2500
Fax: +1.317.240.2255
www.praxairsurfacetechologies.com
psti-info@praxair.com